


MINI IP Dome Camera(PTZ)



Product Dimension

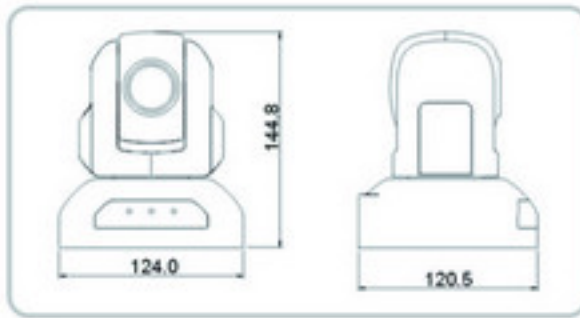


Interface Board

Specifications

	H350	H351	H360	H361
Image Sensor	1/4" SONY CCD			
Zoom	10x Optics			
Infrared	/		30meters IR distance	
Gain Control	auto			
White Balance	auto			
S/N Ratio	>48 db			
Video Codec	H.264			
Resolution	D1(720x576), CIF(352x288), QCIF(176x144)			
Frame Rate	NTSC: 30f/s PAL: 25f/s			
Audio Codec	G.711			
Audio input	1 channel, MIC Interface			
Audio output	1 channel, liner output			
Ethernet Interface	10-100M base-t LAN RJ45			
Network Protocol	PPPOE, TCP/IP, DHCP, UDP, RTP/RTCP, RTSP, UPNP, SMTP, SIP, DDNS, DNS			
WiFi	/	IEEE802.11b/g	/	IEEE802.11b/g
Pan Movement	360 degree Continuously			
Tilt Movement	180 degree			
Pan Speed	1~280degree/s			
Tilt Speed	1~100degree/s			
Preset Position	64 Preset Position			
Patrol Line	4 Patrol Lines			
Boundary Scanning	4 Boundary Scanning			
Privacy Zone	4 Privacy Zone			
OSD Menu	Support OSD Menu			
PTZ Control	RS485: PELCO-P, PELCO-D			
Motion Detection	Support Motion Detection			
Mobile Phone View	Support iPhone, Android, Windows Mobile, Symbian Platform Smart Phone (Optional Function)			
Power Supply	DC12V/1.2A			
Working Condition	Temperature: -10℃~55℃ Humidity: 20%~80% RHG			
Life time	50000 hours(relevant to working situation)			
Size(LxWxH)	145 X 124 X 120mm			
Weight	900g			
Installation	Ceiling/Wall mount			

Shenzhen Oneking Technologies co.,Ltd.



Add: F5, Bldg7, Yusheng Industrial Park, Gushu Xixiang 107
National Road Baoan, Shenzhen, China ZIP CODE: 518126

Tel: 086-0755- 29232422
Fax: 086-0755- 26588269
<http://www.hdipcamera.com>